

## SUNFIRE RADIANT HEATER

### MODEL 150

The SunFire150 will warm the objects and people in your work area to provide an efficient, portable heat source and keep your employees warm and productive.















Radiant heat warms the objects within its vicinity instead of warming the air; so, you and your tools are warm. The SunFire Radiant Heater's proprietary burner provides a clean, efficient burn while it provides maximum heat.

It's rugged construction allows for a variety of applications whether you have an automotive repair shop, agricultural application, need heat at an outdoor event, at a construction or excavation site, the SunFire Radiant Heater will keep you warm all day.

## FUEL EFFICIENT - PORTABLE, CONSTRUCTION/INDUSTRIAL GRADE HEATER

### ADVANTAGES

-  Odorless and smokeless
-  Quiet operation
-  High & low heat settings
-  Standard with fuel filter heater for ultra-cold weather operation
-  Rugged all steel frame and welded steel fuel tank
-  Fuel gauge included as standard
-  Heater tip switch installed - heater will shut off if tipped over
-  Rubber (flat-free) wheels on high quality ball bearing rims
-  Easy lift handle for ease of transport over rugged terrain
-  Low emissions (well below osha guidelines)
-  Can be easily connected to an optional thermostat
-  Heater head can be tilted for more directional heat


**THE SUNFIRE 150 WILL WARM THE OBJECTS AND PEOPLE IN YOUR WORK AREA TO PROVIDE AN EFFICIENT, PORTABLE HEAT SOURCE AND KEEP YOUR EMPLOYEES WARM AND PRODUCTIVE.**

MODEL SUNFIRE 150	SPECIFICATIONS
BTU/hour*	High: 147,000 (43kW) Low: 130,000 (38kW)
Flow Rate	1.1 GPH
Fuels	Diesel, #2 fuel oil
Overall Dimensions, Assembled	32"W x 34"L x 38" H (81cm x 86cm x 96.5cm)

MODEL SUNFIRE 150	SPECIFICATIONS
Approx. Weight Empty Tank	195 pounds (88kg)
Approx. Weight Full Tank	320 pounds (145kg)
Fuel Tank Capacity	19 Gallons (72L)
Electrical Requirements	120V 2A 60HZ or 12V Pure Sine Power Inverter (800W Minimum)

*\*Values indicated above are nominal. Actual values will vary depending on fuel and installation.*

## STANDARD FEATURES

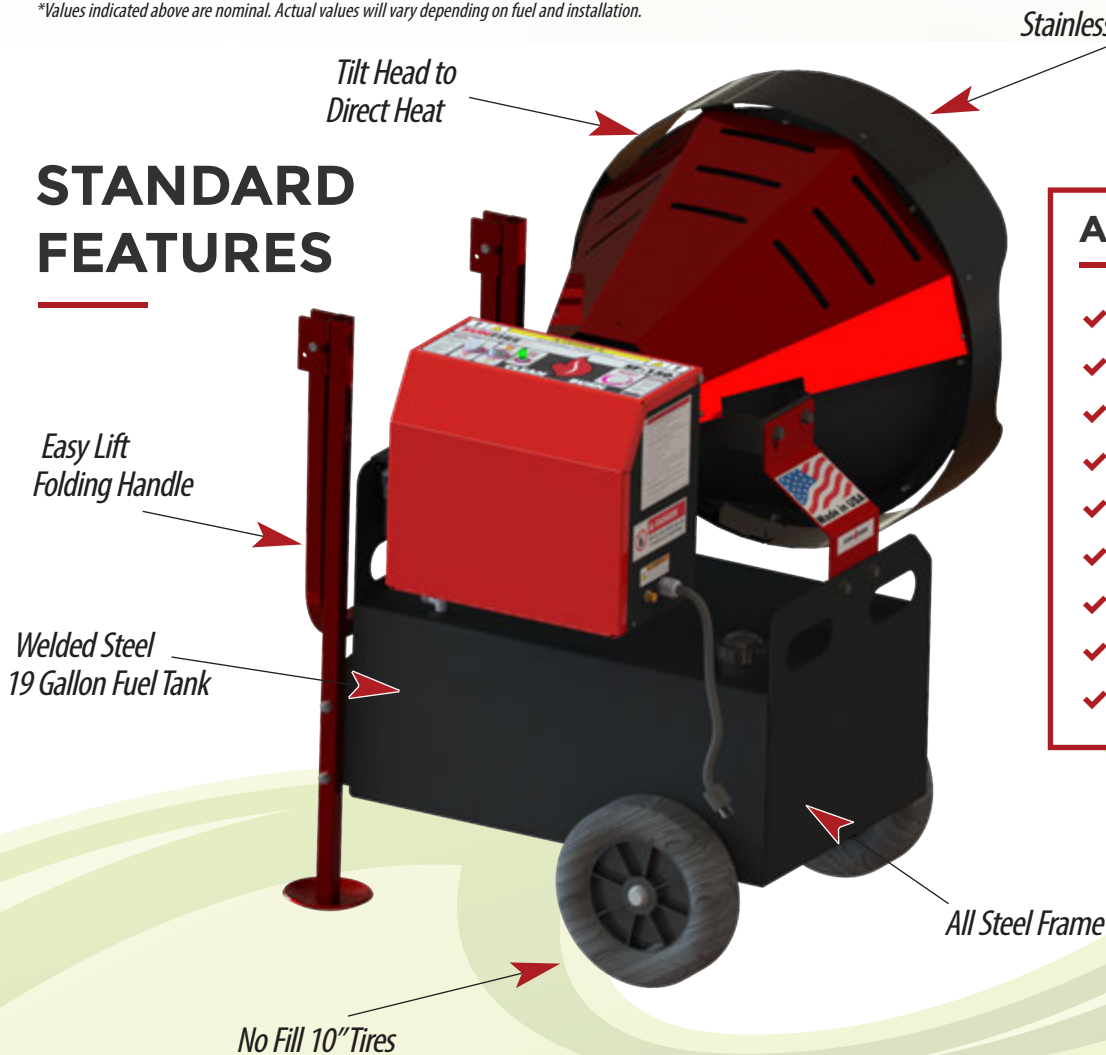

## APPLICATIONS

- ✓ BUILDING CONSTRUCTION
- ✓ WAREHOUSES
- ✓ SPORTING EVENTS
- ✓ LOGGING
- ✓ RANCHING
- ✓ AGRICULTURE
- ✓ AUTOMOTIVE AND TRUCK REPAIR
- ✓ ANY OUTDOOR MACHINERY REPAIR
- ✓ EMERGENCY HEATING



**SUNFIRE**<sup>®</sup>  
RADIANT HEATERS

4109 Capital Circle  
Janesville, WI USA 53546  
1-855-251-1649

[www.SunFireHeater.com](http://www.SunFireHeater.com)